Condensed Matter Physics, 2014, Vol. 17, No 2, 25001: 1–4
DOI: 10.5488/CMP.17.25001
http://www.icmp.lviv.ua/journal

arXiv:1407.2435v1 [cond-mat.mtrl-sci] 9 Jul 2014

Comments and Replies

Discussion on "Characterization of 1–3 piezoelectric polymer composites — a numerical and analytical evaluation procedure for thickness mode vibrations" by C.V. Madhusudhana Rao, G. Prasad, Condensed Matter Physics, 2010, Vol. 13, No. 1, 13703

Y. Sun*, Z. Li

School of Electronics Engineering and Computer Science, Peking University,
No.5 Yiheyuan Road Haidian District, Beijing, 100871, China

Received April 4, 2014, in final form May 5, 2014

In the paper entitled "Characterization of 1–3 piezoelectric polymer composites — a numerical and analytical evaluation procedure for thickness mode vibrations", the dependence of the thickness electromechanical coupling coefficient on the aspect ratio of piezoceramic fibers is studied by finite element simulation for various volume fractions of piezoceramic fibers in a 1–3 composite. The accuracy of the results is questionable because the boundary condition claiming that 'predefined displacements are applied perpendicularly on C^+ plane on all nodes' is not suitable for the analysis of 1–3 composite with comparatively large aspect ratio from 0.2 to 1. A discussion regarding this problem and the suggested corrections are presented in this paper.

Key words: *piezoelectricity, piezoelectric materials, electromechanical effects, polymer-based composites, finite element analysis*

PACS: *77.65.-j, 77.84.-s, 77.65.-j, 81.05.Qk, 02.70.Dh*

1. Problem in the original paper

In C.V. Madhusudhana Rao's and G. Prasad's paper entitled "Characterization of 1–3 piezoelectric polymer composites — a numerical and analytical evaluation procedure for thickness mode vibrations", the dependence of the thickness electromechanical coupling coefficient k_t on the aspect ratio of piezoceramic fibers is studied by finite element simulation for various volume fractions of piezoceramic fibers in the 1–3 composite, and the results are shown in figure 1 (figure 9 in reference [1]). It can be seen that for every fixed volume fraction from 10% to 70%, the electromechanical coupling coefficient k_t decreases with an increase of the aspect ratio of the fiber.

Although k_t decreases, the drop is quite slight and k_t keeps almost unchanged with an increase of the aspect ratio from 0.2 to 1. Those results are obtained based on the condition that the surface displacements of the ceramic phase and the polymer phase are the same. This is obviously unreasonable. When the aspect ratio is from 0.2 to 1, the lateral spatial scale of 1–3 composite is comparatively coarse. In the actual application, when a pressure is applied on 1–3 composite, the displacements of the ceramic phase and the polymer phase are totally different as it was revealed by a laser probe measurement of the displacement of oscillating composite plates [2]. Therefore, it is reasonable to doubt that the boundary condition claiming that 'predefined displacements are applied perpendicularly on C^+ plane on all nodes', which means that the displacements or strains of both ceramic phase and polymer phase are restricted

*E-mail: sunyang@pku.edu.cn

© Y. Sun, Z. Li, 2014

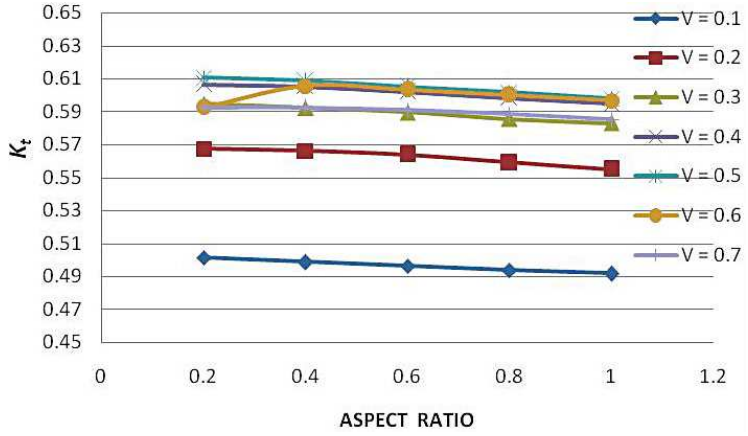

Figure 1. (Color online) Variation of k_t with aspect ratio (from reference [1]).

to be equal, is not suitable for the analysis of 1–3 composite with comparatively coarse lateral spatial scale (i.e., comparatively large aspect ratio from 0.2 to 1). In order to conform to the actual condition, the boundary condition should be revised as 'a predefined pressure is applied perpendicularly on C^+ plane'. In fact, with an increase of the aspect ratio, k_t will drastically decrease instead of keeping almost unchanged.

2. Proof in the existing reference

The theoretical model of 1–3 composite has been developed according to Newnham's parallel connectivity theory [3], in which 1–3 composite is restricted to be an effective homogeneous medium. In W.A. Smith's model [2] and Chan's model [4], it was assumed that the spatial scale of 1–3 composite is so fine that the composite is validly represented as a homogeneous medium for the frequencies of interest near the thickness resonance. The corresponding approximation embodied the picture that the ceramic and polymer moved together in a uniform thickness oscillation. Thus, the vertical strains were the same in both phases. The homogonous medium assumptions are obviously not satisfied when the spacing between pillars of 1–3 composite are not so fine. So, the theoretical model will not fit for the analysis of the 1–3 composite in such a case. Electro-elastic properties of the 1–3 composite will also be affected by the allocation and arrangement of the pillars.

John A. Hossack and Gordon Hayward [5] thoroughly investigated the effect of ceramic volume fraction, pillar shape and pillar orientation on the vibrational and electromechanical characteristics of 1–3 composite transducers using the finite element analysis. It revealed that the pillar shape and aspect ratio had a great and complex impact on the parameters of the composites. For the circular section pillars with square arrangement, the pillar aspect ratio is defined as the ratio of diameter to the height, which is the same as the case in [1]. The two phase materials are PZT-5A and CY1301-HY1300, whose properties are similar to those of PZT-7A and Araldite D in reference [1] (from reference [4]), respectively. The dependence of the coupling coefficient of 20% circular composite on the pillar aspect ratio is shown in figure 2 (figure 11 in [5]). The thickness mode corresponds to the curve (1). It can be seen that for the 20%-volume faction composite, it showed a rapid deterioration in the coupling coefficient for increasing pillar aspect ratios. This is obviously different from the result shown in figure 1.

3. Suggested corrections

For cylindrical fibers having a square arrangement, the variation of k_t with the aspect ratio is recalculated under the revised boundary condition claiming that 'a predefined pressure is applied perpendicularly on C^+ plane'. The two phase materials are PZT-7A and Araldite D in reference [1] and the

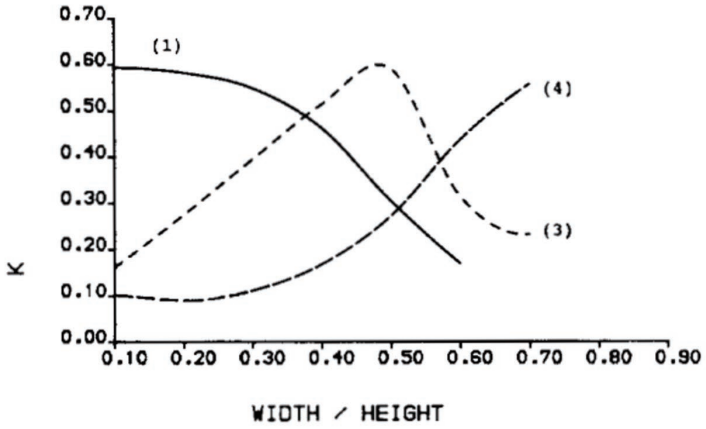

Figure 2. Dependence of the coupling coefficient in a 20% circular composite transducer, on the pillar aspect ratio. Curve (1): thickness mode (concerned). (From reference [5]).

parameters are also taken from reference [4]. (The parameters of reference [1] are taken from reference [4]). The elastic constants c_{33}^D and c_{33}^E are calculated to obtain the thickness electromechanical coupling coefficient $k_t = \sqrt{1 - c_{33}^E / c_{33}^D}$ ($\sqrt{1 - c_{33}^E / c_{33}^D} = e_{33} / \sqrt{c_{33}^D \epsilon_{33}^S} = h_{33} / \sqrt{c_{33}^D \beta_{33}^S}$).

To cause the change of the strain in X_{3-} direction, a predefined pressure is loaded perpendicularly on C^+ plane. At the same time, zero displacement is loaded on C^- plane. Planes A^+, A^-, B^+, B^- are also clamped in their normal directions in order to set strain tensors in other directions to zero. For c_{33}^E, 'constant electric field' means that C^+ plane and C^- plane are short-circuited. Thus, C^+ plane and C^- plane are kept at zero potential. While for c_{33}^D, 'constant electric displacement field' means that C^+ plane and C^- plane are open-circuited.

The suggested correction of variation of k_t with the aspect ratio is shown in figure 3. Compared with figure 1, the range of the aspect ratio is extended to $0.005 - 1$. It can be seen that with an increase of the aspect ratio, k_t drastically decreases, especially for the low volume fraction.

When the aspect ratio is very small (the lateral spatial scale is very fine), the values of k_t are compar-

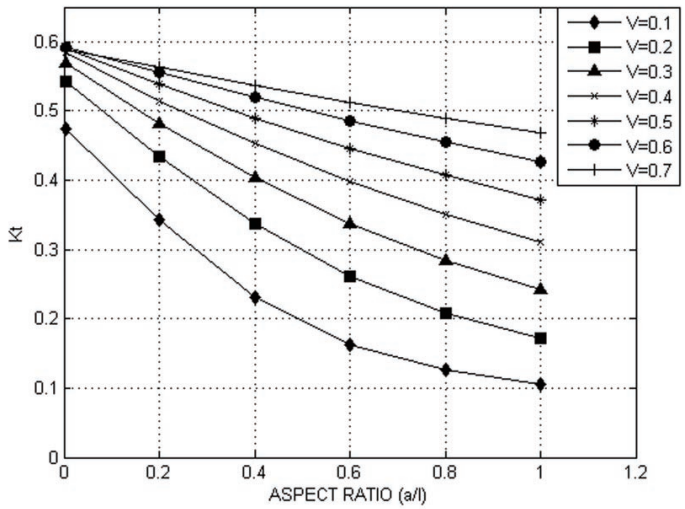

Figure 3. Suggested correction of variation of k_t with aspect ratio.

atively large and are approximately equal to those in figure 1. This is because when the lateral spatial scale is fine enough, the surface displacements of the ceramic phase and the polymer phase are the same under a pressure load. The effects of boundary conditions claiming that 'predefined displacement' and 'predefined pressure' are nearly the same. However, when the aspect ratio is comparatively large (the lateral spatial scale is comparatively coarse), much of the pressure on the composite will be squandered in compressing the piezoelectrically inactive phase. The matrix phase presents a displacement with amplitude much larger than that of the ceramic phase. Therefore, piezoelectricity of the composite will be greatly reduced and k_t will drastically decrease.

References

1. Madhusudhana Rao C.V., Prasad G., Condens. Matter Phys., 2010, **10**, 13703; doi:10.5488/CMP.13.13703.
2. Smith W.A., Auld B.A., IEEE T. Ultrason. Ferr., 1991, **38**, 40; doi:10.1109/58.67833.
3. Newnham R.E., Skinner D.P., Cross L.E., Mater. Res. Bull., 1978, **13**, 525; doi:10.1016/0025-5408(78)90161-7.
4. Wah Chan H.L., Unsworth J., IEEE T. Ultrason. Ferr., 1989, **36**, 434; doi:10.1109/58.31780.
5. Hossack J.A., Hayward G., IEEE T. Ultrason. Ferr., 1991, **38**, 618; doi:10.1109/58.108860.

Коментар до статті С.В. Мадусудгана Рао, Г. Прасад, "Характеристика 1–3 п'єзоелектричних полімерних композитів — числова і аналітична процедура оцінки вібрацій мод товщин", Condensed Matter Physics, 2010, Vol. 13, No. 1, 13703

Я. Сан, Ж. Лі

Вища школа електронної інженерії і комп'ютерних наук, Пекінський університет, Пекін, Китай

У статті "Характеристика 1–3 п'єзоелектричних полімерних композитів — числова і аналітична процедура оцінки вібрацій мод товщин", досліджується залежність коефіцієнта товщини електромеханічного зв'язування від коефіцієнта волокнистості п'єзокераміки методом комп'ютерного моделювання скінченного елемента для різних об'ємних долей п'єзоелектричних волокон в 1–3 композиті. Точність результатів є під знаком питання, тому що гранична умова, яка зумовлює зміщення у напрямку, перпендикулярному до C^+ площини на всіх нодах, є непридатною для аналізу 1–3 композиту з порівняльно великим коефіцієнтом від 0.2 до 1. Тут є представлено обговорення цієї проблеми і запропоновані поправки.

Ключові слова: *п'єзоелектричність, п'єзоелектричні матеріали, електромеханічні ефекти, полімерні композити, аналіз скінченного елемента*